

FlexTop 2201 Temperature Transmitter

4...20 mA transmitter for Pt100 sensors

2-, 3- or 4-wire sensors

Accuracy better than 0.25°C

Sensor offset correction

Automatic/configurable cable resistance compensation (2-wire)

Sensor error detection

2-way configuration (Windows)

Configurable damping and status indication

Engineering unit °C or °F

PC datalogging

Excellent temperature stability

Ex ia IIC T5/T6, ATEX II 1G



Description

FlexTop 2201 is a 4...20 mA loop-powered transmitter for Pt100 sensors.

Either 2-, 3- or 4-wire sensors can be used. For 2-wire sensors an automatic balancing of the sensor cable resistance is possible with shorted sensor cable. The cable resistance can be manually configured as well.

Using a PC, the Windows-based Flex-program and a FlexProgrammer configuring unit, the following parameters can be configured via the output connectors (2-way communication): TAG no., number of wires, cable resistance, error detection level, measuring range/unit, damping, offset and status indication.

The Flex-program has a datalogging facility enabling the user to monitor measuring results or calibrate the measuring setup.

FlexTop 2201 is embedded in silicone which makes it resistant to humid environments.

FlexTop 2201, fitting into the DIN B housing, has a 6 mm center hole for quick sensor replacement. The spring loaded mounting screws ensure a safe fastening even in vibrating environments.

HAENNI

HAENNI INSTRUMENTS AG
CH-3303 Jegenstorf
Tel: +41(0) 31 764 99 11
Fax: +41(0) 31 764 99 22
e-mail: info@haenni-instr.com
Web: www.haenni-instr.com

HAENNI MESS-SYSTEME GMBH
Hofener Strasse 122
D-70372 Stuttgart
Tel: +49 (0) 711 50 35-0
Fax: +49 (0) 711 50 35-175
e-mail: haenni-instr@t-online.de
Web: www.haenni-instr.com

HAENNI INSTRUMENTS SAS
Espace Multiservices, Lot 4
Bat N.4, Bd de Courcerin
F-77183 Croissy Beaubourg
Tel: +33 (0) 1 60 06 89 89
Fax: +33 (0) 1 60 06 89 80
e-mail: haenni@wanadoo.fr
Web: www.haenni-instr.com

HAENNI INSTRUMENTS INC.
1103 Wright Avenue
Gretna, Louisiana 70056
USA
Tel: +1 (504) 392 33 44
Fax: +1 (504) 392 65 00
e-mail: haenni@bellsouth.net
Web: www.haenni-instr.com

Technical Data

Input

Accuracy	
Span < 250°C:	< 0.25°C {2}
Span > 250°C:	0.1% of span
Sample time	< 0.7 sec.
Pt100 Standard	IEC/DIN/EN 60 751-2
RTD measuring current	0.3 mA, continuously
Sensor type	2-, 3- or 4-wires {1}
Sensor short detection	< -225°C
Sensor break detection	> 875°C
Error detection delay	< 10 sec.
Compensation for cable error	< 0.02°C/Ohm (3-wire)
Cable resistance	Max. 20 Ohm /wire {1}
Measuring range	-200...850°C {1}
Measuring unit	°C or °F {1}
Minimum span	25°C
Protection	+/- 35 V _{dc}
Suppression	50 and 60 Hz
Resolution	14 bit
Repeatability	< 0.1°C
Ripple immunity	IEC 770 6.2.4.2
Offset Adjustment	Max. + 10°C {1}

Output

Signal span	4...20 mA, 2-wire
Accuracy	< 0.1% of signal span
Supply range	8...35 V _{dc}
Ripple immunity	3 V _{rms}
Load equation	$R_L < (V_{cc} - 8)/23$ [kOhm]
Up/Down scaling limits	23 mA/3.5 mA {1}
Damping	0...30 sec. {1}
Protection	Reversed polarity protection
Resolution	12 bit
Effect of variations in supply voltage:	
Output current	0.01% per volt
TAG No.	15 characters {1}

Environmental conditions

Operating temperature	-40...85°C
Humidity	< 98% RH, cond. (IEC 68-2-38)
Vibrations	GL, test 2 (IEC 68-2-6)
Long-term test	IEC 770 6.3.2

EMC data

Immunity	Complies with EN 50082-2
Emission	Complies with EN 50081-1

EX data (Demko)

Supply range	8...28 V _{dc}
Internal inductivity	L _i < 10 µH
Internal capacity	C _i < 10 nF
Barrier data	U _{max} = 28 V _{dc} ; I _{max} = 0.1 A P _{max} = 0.7 W
Approval	EEx ia IIC T5/T6, ATEX II 1G EEx ia IIC T1...T5: -40 < T _{amb} < 85°C EEx ia IIC T6: -40 < T _{amb} < 50°C
Standards	EN 50014 and EN 50020

Mechanical data

Dimensions	ø44 x 19 mm
Protection class	Housing: IP 40 Terminals: IP 00

Other data

Temperature drift	Typ. 0.003% per °C Max. 0.01% per °C
Power-on time	10 sec.

Test conditions

Configuration	0...100°C
Amb. temperature	23°C +/- 2°C
Power supply	24 V _{dc}

Disposal of product and packing

According to national laws or by returning to Haenni.

Notes

- {1} Configurable
- {2} Lower range limit < 100°C

Ordering Details

FlexTop 2201


2201 xxxx	Type
0001	Not configured, standard safety
0002	Not configured, Ex safety

Configuration


2201 9900	Configuration according to customer specifications
-----------	----------------------------------------------------

Note: The FlexTop 2201 can be supplied in a 30 pcs. packing. Please contact Haenni for further information.


Non-Ex-application

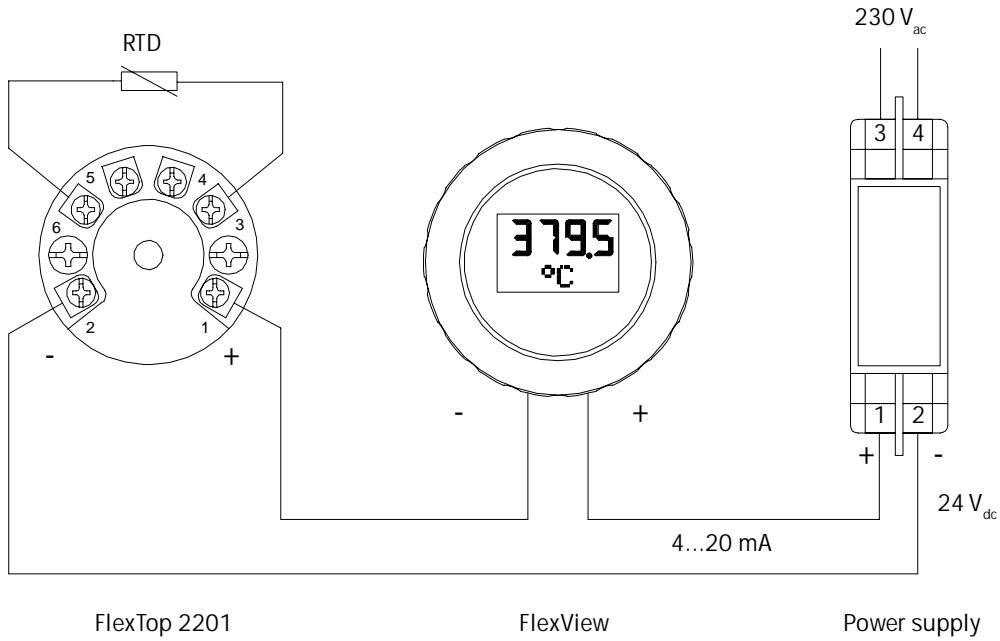

Electrical Installation

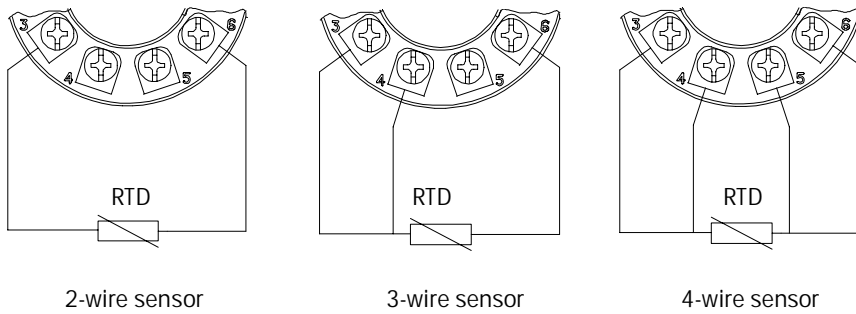

Dimensional Drawing

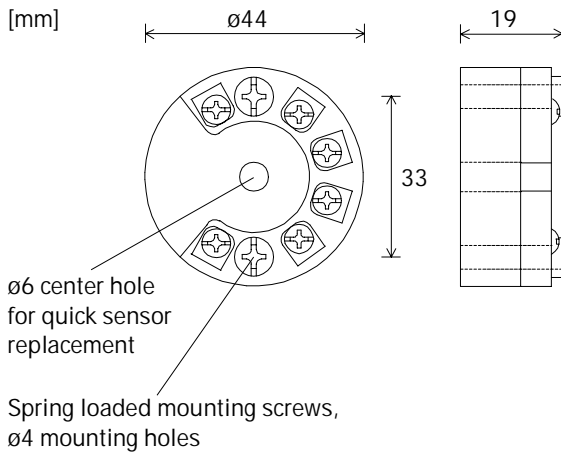

Accessories

FlexProgrammer configuration set, type number 82 23-903 comprises:

FlexProgrammer with 9 pole RS232C cable
 3.5" Program diskettes
 Battery plug
 Cable with test plugs



